





Inductive Sensors Series 60 - AC / DC

Housing M 22 x 1.5

- Housing material: PA / PPO
- Sensing distance $S_n = 5$ mm



Technical data	Flush mountable
Operating distance S_n	5 mm
Electrical version	2-wire AC / DC
Output	NC (Normally closed)
Type	IAS-60-20-Ö-M22-PPO-Z0E-0-E
Art.-No.	616 712
Operating voltage (U_B)	20...250 V AC / DC
Output current max. (I_e)	300 mA
Load current min.	Typ. 9 mA
Voltage drop max. (U_d)	Typ. 6 V
No-load current (I_o)	Typ. 3,5 mA
Frequency of operating cycles	25 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2
Connection	0.55 m, Silicone cable, 2 x 0.75 mm ²
Housing material	PPO
Active surface	PPO
Lid	PA
Accessories (included in delivery)	2 nuts M 22 x 1.5

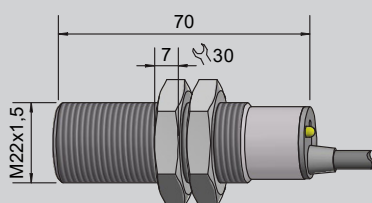

Made in Germany